





## GROWER'S CHOICE HORTICULTURAL LIGHTING



**4' X 2'**

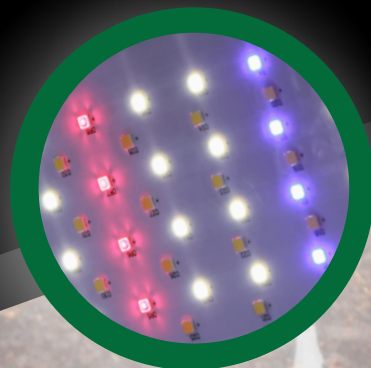

**DUAL  
SPECTRUM**

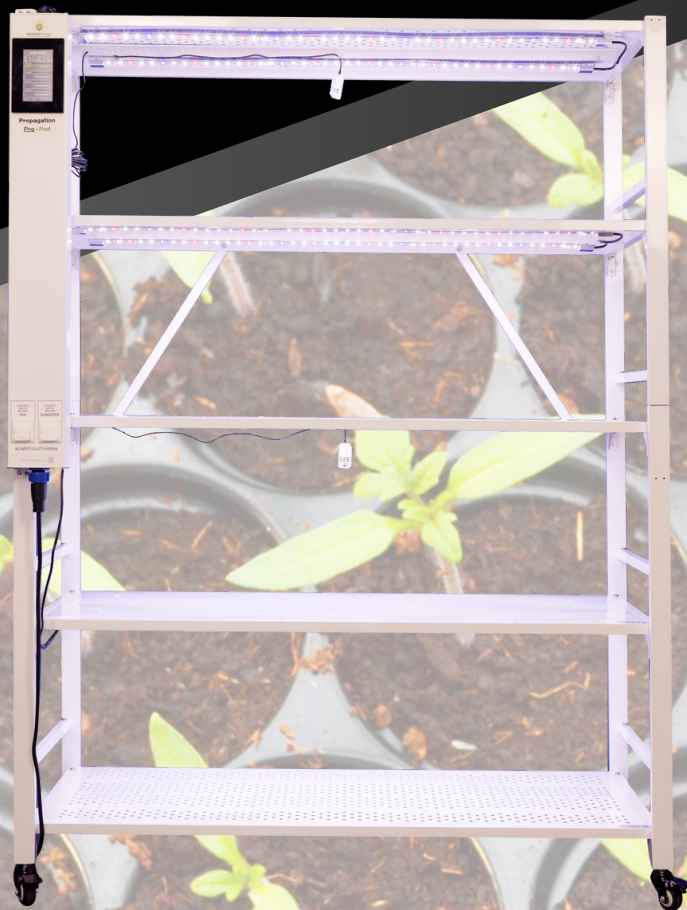

**ONBOARD  
CONTROLLER**



**ENVIRONMENTAL  
CASING**

# Propagation Pro - Pod

STARTING AT  
**\$1,099**





Model \_\_\_\_\_  
Date \_\_\_\_\_ Job Name \_\_\_\_\_  
Type \_\_\_\_\_

## GC-Clone Rack

Grower's Choice is proud to introduce our new all in one commercial clone solution. Offering individually controllable and customizable propagation zones. This fully modular system gives growers the ability to veg their plants all within the same system due to the integrated cloning and vegetative spectrums. Unleash the full potential of your clones.

## Features

- Onboard timer and dimmer controller
- Dual Spectrum
- 108-277VAC Input
- IP65
- Modular

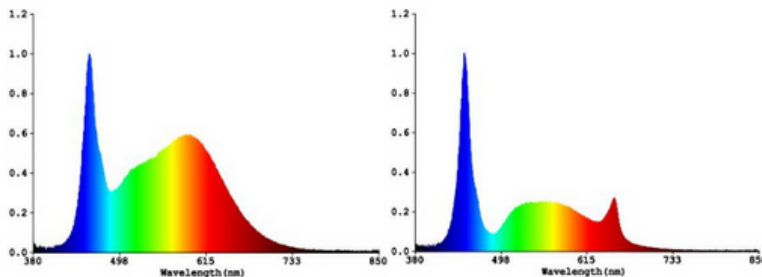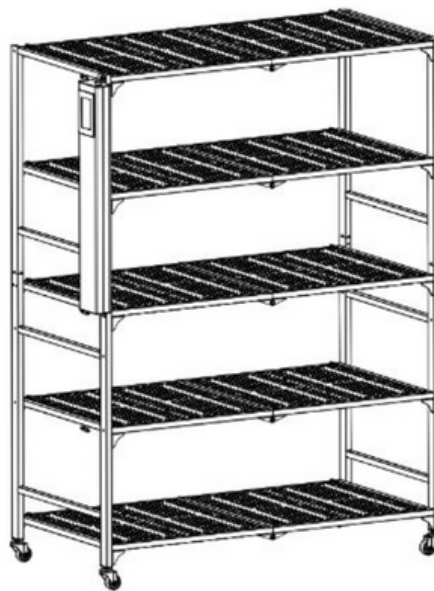


## Ordering Information

| Series | Model      | Spectrum                                     |
|--------|------------|----------------------------------------------|
| GC     | Clone Rack | CLS<br>Clone spectrum<br>5K<br>5K-Vegetation |

|              |               |                   |
|--------------|---------------|-------------------|
| AC PLUG TYPE | Ac Power Cord | MOUNTING HARDWARE |
|--------------|---------------|-------------------|

N5PNEMA 5-15P  
N6PNEMA 6-15P  
L7P NEMA L7-15P  
PTPigtails

01 1FT Total 9ft  
08 8FT Total 16ft  
15 15FT Total 23ft

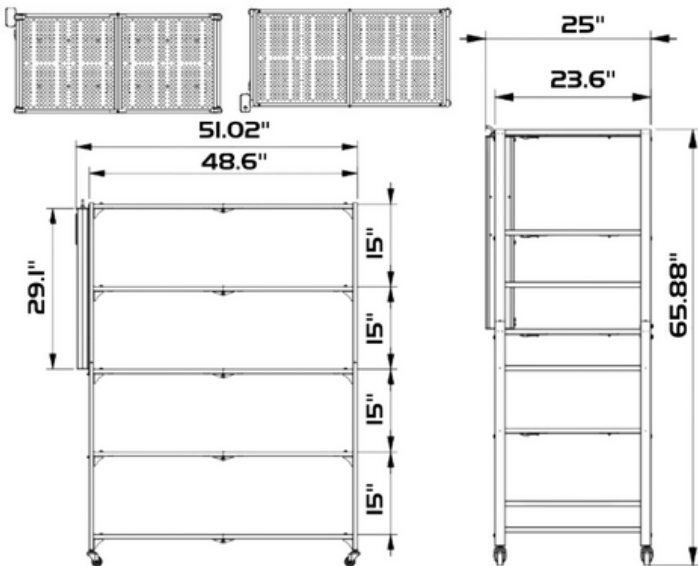

## SPECIFICATIONS

|                            |                                        |
|----------------------------|----------------------------------------|
| Model Number               | Clone Rack                             |
| Light Source               | LED                                    |
| Spectrum                   | GC-5K Full Phase and GC-Clone Spectrum |
| PPF                        | 275 umol/s Per Level                   |
| Input Power                | 440w                                   |
| Efficacy                   | 2.5 umol/s                             |
| Fixture Dimension / Weight | 51.02"L x 25" W x 65.88" H / 70lbs     |
| Mounting Height            | Set                                    |
| Thermal Management         | Passive                                |
| Max. Ambient Temperature   | 104°F/40°C                             |
| Dimming                    | 0-10V                                  |
| Light Distribution         | 120°                                   |
| Lifetime                   | L90: >54,000 hrs                       |
| Power Factor               | >90%                                   |
| Certifications             | IP65                                   |
| Warranty                   | 5 Years Standard Warranty              |

AMPERAGE BY VOLTAGE SERVICE @ 440W

|          |      |      |      |      |
|----------|------|------|------|------|
| VOLTAGE  | 120V | 208V | 240V | 277V |
| AMPERAGE | 3.7A | 2.1A | 2A   | 1.6A |